15 Plafo>The Ultra Slim LED Panel Plafo Aluminium + PC

62038F/W/C

38W LED slim plafo light, IP40, suitable for residential and commercial application.
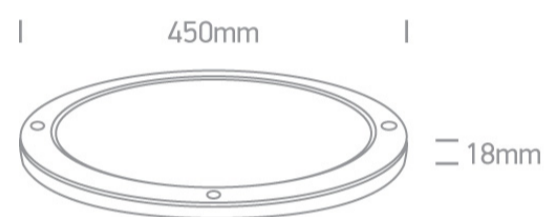
Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.

IP40 80 CRI CE

Downloads

IES

Dimensions

450mm

18mm

Gallery

super slim!

Physical Specification

Item Group	15 Plafo
Family	The Ultra Slim LED Panel Plafo Aluminium + PC
Order Code	62038F/W/C
Colour	White
Material	Aluminium
Diffuser Material	PC
Shape	Circular

Height	18mm
Diameter	450mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	▢
Power(Watts)	38W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Safety Class	III
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 4014
LED Brand	Sanan
F Mark	F

Gear

Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	38W
Constant Current	Yes
IP Rating	IP20
Safety Class	☐
Dimmable	No

Illumination Data

Colour Temperature	4000K
Lumen Output	3000lm
Light Efficiency	78,9lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	1,8kg
Pcs/Carton	10
Barcode	5291889051794
HS Code	9405409900

Energy Label

one

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT