




Download

DXF 2D
- panbas.dxf

Montaggi
- PANNELLO_ECO rev14.pdf

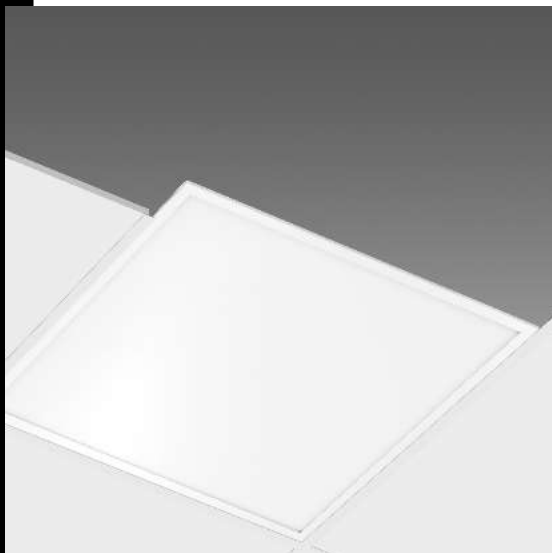

Pannello B

The superior quality of LED lighting is now more accessible thanks to a benchmark product that offers, at reduced costs, the ideal light for offices, shopping malls, hotels and in general all those spaces that need constant lighting.

Wiring: rapid wiring connection, the fixture does not need to be opened.

Instant start with no shimmer and absolutely silent operation.

Inner slab: in PMMA. Diffuser: extruded in opal engineering plastic with high thermal transmittance. Energy saving of over 50% compared to traditional lights to fluorescent tubes.

No RF interference and electromagnetic emissions.


No risk to the environment due to the absence of materials containing mercury or lead.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards. Installable on normally inflammable.

Power factor: 0.95

Luminous flux maintenance 80% 40.000h (L80B20)

Photobiological safety class: exempt group

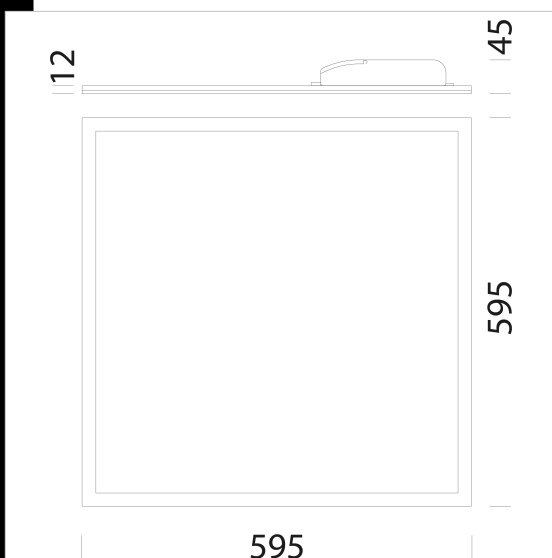

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22184371-00	CLD CELL	3,57	LED-3560lm-4000K-CRI 80	34 W	BIANCO
22184373-00	CLD CELL	3,95	LED-3311lm-3000K-CRI 80	34 W	BIANCO

Accessori



- "Y" Simple suspension with



- "Y" Suspension with cable



- Frame - 600x600



- "Y" Powered suspension

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated