



**Download**


DXF 2D  
- snow70.dxf

Montaggi  
- SNOW\_50-70-111 rev2.pdf



**Snow 70**

Housing: in die-cast aluminium with heat sink.  
Coating: epoxy polyester powder coating resistant to UV rays.  
Reflector: anti-glare shield with lens for controlling luminous intensity distribution.  
Standard gear: complete with nuts and screws in anti-corrosion stainless steel.  
Silicone rubber protection gasket compliant with French low-energy building standards (BBC).  
Standards: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529.  
LED: 80% luminous flux maintenance at 80%: 50.000h (L80B20).  
Photobiological safety class: exempt group EN62471.

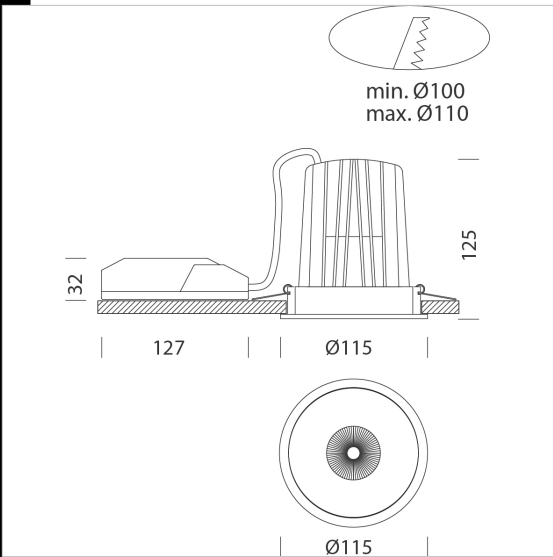

| Code        | Gear     | Kg   | Lumen Output-K-CRI              | WTot | Colour |
|-------------|----------|------|---------------------------------|------|--------|
| 22082715-00 | CLD CELL | 0,55 | LED COB-2338lm-3000K-40°-CRI 90 | 25 W | BIANCO |
| 22082716-00 | CLD CELL | 0,57 | LED COB-2514lm-4000K-40°-CRI 90 | 25 W | BIANCO |

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated